Data sheet

LIGHT & PLAY BANNER


Changelog

Date	Details
2025/01	Creation

Product Dimensions

(mm)	Diagonal	Α	В	C1	C2	D	ΕΊ	E2	FI	F2	
BANNER	1678.7	1697.2	358.6	24.7	51.7	170	23	23	600	200	

^{*} D is the distance between suspension cables

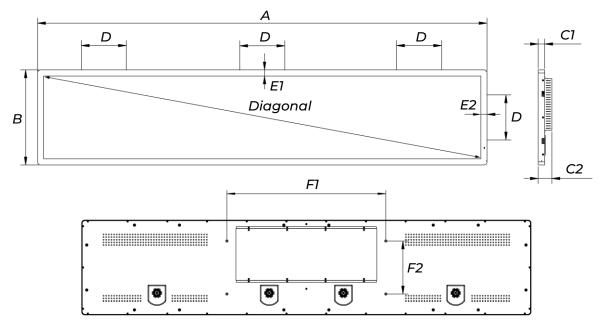

Main characteristics

		BANNER		
Refer	ence	1124224003		
Proc	duct	LIGHT & PLAY		
Brigh	tness	2000cd/m²		
Diag	onal	66"		
Power con	sumption	120w (Max.)		
Resol	ution	3840x720px		
Net w	eight	13.41kg		
Gross v	weight	18.82kg		
	Length	1827mm		
Packaging	Height	499mm		
	Depth	150mm		

vitrinemedia

Data sheet

LIGHT & PLAY BANNER

Specifications

	Items	BANNER		
	Outside dimensions	1697.2x358.6x51.7mm		
	Frame's bezel dimension	24.7mm (L) 24.7mm (H)		
	Vesa dimensions	600x200mm		
	Screen format (viewing area)	1649.7x311mm		
	Aspect ratio	16:3		
	Contrast ratio	1200:1		
General	Screen orientation	Portrait or Landscape		
Contract	Vision angle (H/V)	178° (Min.) / 178° (Min.)		
	Color	Matt black		
	Shell materials	Aluminum (Front & Back)		
	Backlight system	ĹED		
	Response Time	8ms		
	Color temperature	7400±500k		
	Lifespan	50 000hrs		
	Operating System	Android 11		
	CPU	4-core ARM Cortex-A55 2Ghz		
System	GPU	Mali-G52 2EE supports OpenGL ES 1.1/2.0/3.2、OpenCL2.0 and Vulkan1.1 Embedded high-performance 2D acceleration hardware		
	RAM	4GB		
	ROM	32GB		
	Language	Multi language		
Network	Wi-Fi	2.4/5GHz support IEEE 802.11 a/b/g/n/ac/ax		
connection	Ethernet	Yes		
	Bluetooth	4.2		
	RJ45	1		
	USB	1 USB 2.0、1 USB3.0		
Input	Temperature sensor	1		
	Brightness sensor	1		
	TF card slot	1		
Supported mode	With network	VM APP		
Supported mode	Without network	VM LIVE USB mode		
	Operating time	24/7		
Operating	Operating humidity	10%-80% (non-condensing)		
environment	Operating temperature	0-40°C (with direct sunlight) 0-50°C (without direct sunlight)		
Brightness management	Smart Backlight Control	Yes		
Thermal	Smart Temperature Control	Yes		
management	Smart Fans Control	Yes		
	Overheating protection	Yes		
Power	Power Supply	24V DC		
Accessories	Cables	Single hammer cables: 2 pair of 300CM		

vitrinemedia

Data sheet

LIGHT & PLAY BANNER

Warning:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help. The equipment complies with FCC Radiation exposure limit set forth for uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

vitrinemedia