




NEW I MAX

Detailed Itemized List

Quantity	Description
1	NEW I MAX Display Panel
4	Fixtures
1	Allen Key
1	Certificate of authenticity

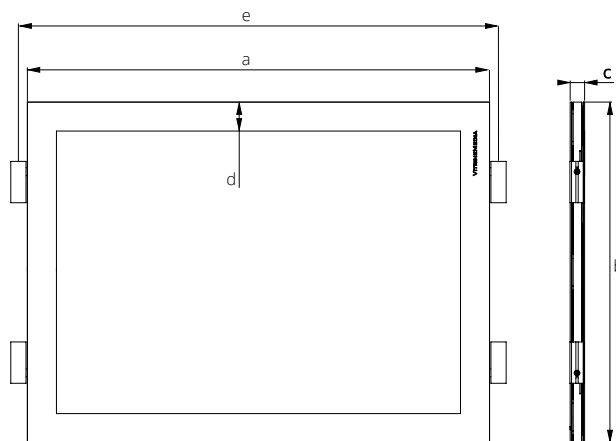

Dimensions [mm]

	a	b	c	d	e	
A4	334	247	10	21	H a + 7,5	V b + 7,5
A3	457	334				
A2	631	457				
A1	878	631				

Technical Data					
General	Format	A4	A3	A2	A1
	Supplier Reference	1011914001	1011914002	1012412035	1011914003
	VM Reference	NIM10D_A4_Noir	NIM10D_A3_Noir	NIM10D_A2_Noir	NIM10D_A1_Noir
	Orientation	Horizontal / Vertical / Tilted			
	System	Suspended cables			
	Patent Number	FR2991489 WO2013178747			
	Model Number	N/A			
	Weight (kg)	0.85	1.53	2.78	N/A
Electricity	Incoming voltage (VCC)	24			
	Power (W)	5	7.5	10.5	27
	Max. Intensity (A)	0.245	0.35	0.49	1.8
Luminosity	One sided (LUX)	5400	5000	2900	2700
	Dual sided (LUX)	4700	4400	2500	2300

Logistical Data				
Package size (mm)	283 x 25 x 370	370 x 25x 493	493 x 25 x 667	667 x 26 x 914
Export box size (mm)	395 x 395 x 300	505 x 395 x 390	682 x 270 x 508	992 x 129 x 752
Units per export box	15	15	10	3
Gross weight per export box (Kg)	15.6	26.9	33.4	N/A

Product Use		
Environment	Temperature	Humidity
Storage conditions	-5C° - 60C°	10% - 95% RH Uncondensed
Environment of use	0C° - 40C°	20% - 90% RH Uncondensed
Maintenance	No detergents or abrasive products	
Use	Up to 80 000 hrs	

