




VM TWO

Detailed Itemized List

1 x VM TWO A0 Display panel
2 x 48mm Double end cables
1 x Certificate of authenticity

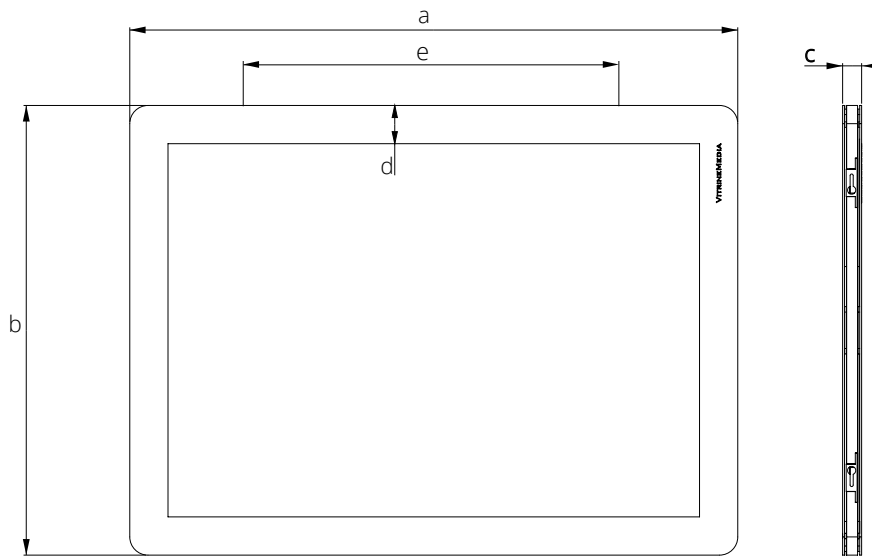

Dimensions [mm]

	a	b	c	d	e
A4	334	247	10	21	170
A3	457	334	10	21	170
A2	631	457	10	21	170
A1	878	631	10	21	170

Technical Data

	Format	A4	A3	A2	A1
General	Supplier Reference	1012412029	1012412030	1012412031	1012412032
	VM Reference	BUM10D+_A4	BUM10D+_A3	BUM10D+_A2	BUM10D+_A1
	Orientation	Horizontal & Vertical			
	System	Suspended cables			
	Patent Number	FR29996674 WO2013178747			
	Model Number	002220459-001			
	Weight (Kg)	0.84	1.39	2.87	N/A
	Electricity	Incoming voltage (V)	24		
Power (W)		5	7.5	10.5	27
Intensity (A)		0.245	0.35	0.49	1.8
Luminosit	One sided (LUX)	5400	5000	2900	2700
	Dual sided (LUX)	4700	4400	2500	2300

Logistical Data

Package Size (mm)	283 x 25 x 370	370 x 25 x 493	493 x 25 x 667	667 x 26 x 914
Export box size (mm)	385 x 415 x 298	508 x 415 x 385	682 x 280 x 508	929 x 178 x 682
Number of units per export box	15	15	10	6
Export box gross weight (Kg)	16	26.7	35.8	22.5

Product Use

Environment	Temperature	Humidity
Storage conditions	-5°C - 60°C	10% - 95% RH Uncondensed
Environment of use	0°C - 40°C	20% - 90% RH Uncondensed
Maintenance	No detergents or abrasive products	
USE	Up to 80 000 hrs	

